


**PROJECTOR LUMINAIRE**  
**HELIOS**

**F53-216120**




**PRODUCT FEATURES**

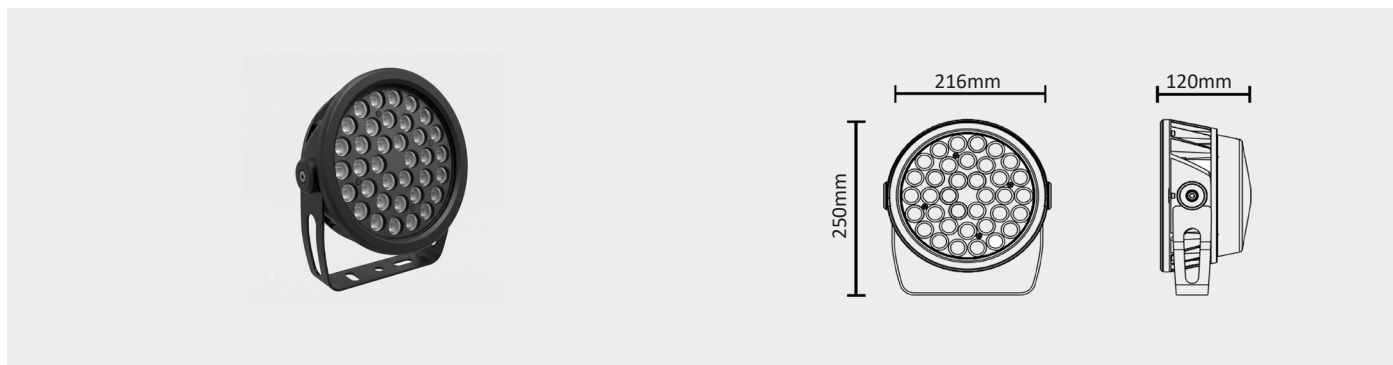

**DESCRIPTION**

The floodlight luminaire is constructed from high quality die-cast aluminum, ensuring durability and efficient heat dissipation for long-term performance. Designed as a high-performance projector light, it provides powerful illumination for outdoor and architectural applications. The luminaire features advanced optics delivering uniform light distribution with multiple beam angle options. Its adjustable mounting design allows precise aiming and flexible installation on-site. Engineered with high-efficiency optical technology, it ensures consistent output with minimized glare across various applications.

**LIGHT DISTRIBUTION**

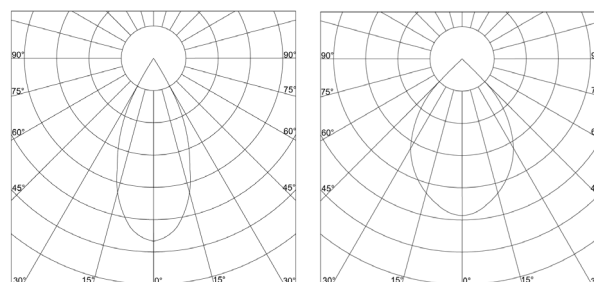

**FINISHES**



**PRODUCT PARAMETER**

| Power | Input Voltage            | Beam Angle | CRI      | CCT   | Control Type  | Finishes    | IP Rating |
|-------|--------------------------|------------|----------|-------|---------------|-------------|-----------|
| 65W   | AC 120V-277V<br>50-60 Hz | 15°        | 90-Ra>90 | 2700K | On/Off        | Black       | IP-66     |
|       |                          | 30°        |          | 3000K | Phase Dimming | Gray Silver |           |
|       |                          | 60°        |          | 4000K | 0-10V Dimming | Basalt Gray |           |
|       |                          | 90°        |          | 6000K | DALI Dimming  |             |           |

\*\*Please provide the specific details based on the requirements for the products you are ordering.